

INSTALLATION AND SAFETY INSTRUCTIONS

FOR YOUR SAFETY

WARNING: BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF; EITHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS SHUT OFF.

GENERAL

You don't need special tools to install this lamp. Be sure to follow the steps in the order given. Read instructions carefully. If you are unclear as to how to proceed, consult a qualified electrician.

ASSEMBLY STEP

Carefully remove the lamp from the carton and check that all parts are included as shown in figure. Be careful not to misplace any of the screws or parts, which are needed to install this lamp.

STEP 1: Thread pipe (K) into nipple (L), nipple (J) into pipe (K), pipe (I) into nipple (J), and arm (H) to pipe (I). Carefully pull out the cable (O) and then attached the pad (N) to the base (M).

STEP 2: Install Bulbs (F), (Bulb included, please do not exceed the maximum capacity which is recommended on the Socket Cover (E)).

STEP 3: Remove the screws (B) and switch (C) from the fixture, then attached the glass (G) to the glass holder (A) and thread the switch (C) through the hole of the glass (G) to the small nipple (D) of the socket.

STEP 4: Secure the glass (H) with screws (B) to the glass holder (A).


STEP 5: Attached the plug (Q) to the outlet box and turn on the light by the switch (C).

CLEANING

To clean, wipe lamp with a soft cloth. Clean glass with a mild soap. Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.

ORDERING PARTS

Keep this sheet for future reference, and in case you need to order replacement parts. Be sure to use exact wording from illustration when ordering parts.

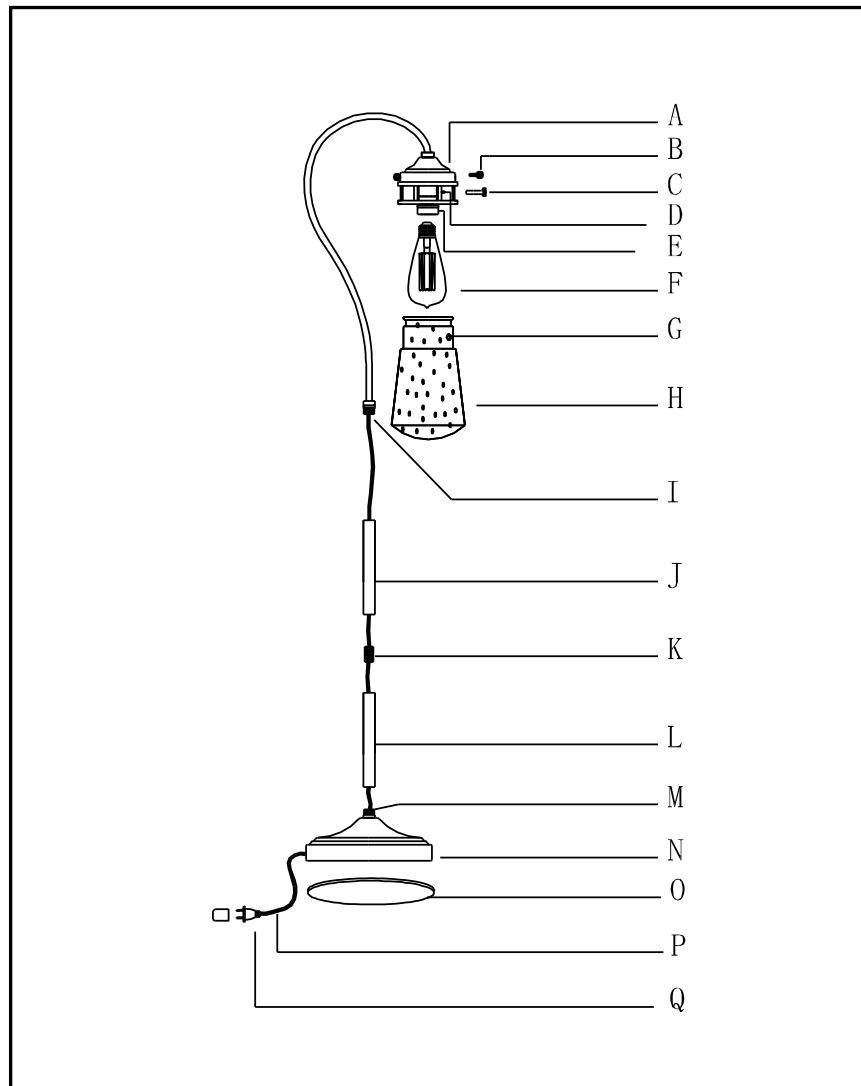

Line art shown may not exactly match the fixture enclosed. However, the installations do apply to this fixture.

ITEM NO.: FL120-OB FL120-BN

